
Wiha advertising articles.

Your name on every measurement tool.



Because of their excellent characteristics the Wiha measuring tools make perfect advertising products for you and your customers. Do you place value on high quality advertising products with a long service life? Then the folding rulers of the Longlife series with their perfect long-life properties are the perfect solution. The water resistant and scratch and score-proof fibreglass reinforced plastic makes the Longlife ruler the best advertising product for all applications, with a distinctly longer advertising duration than a wooden folding ruler.

Whether 2 m, 1 m, yellow or white, the Wiha folding rulers embellished with your imprint give you and your customers the ideal surface for long-term advertising effects. Advertise your imprint on the side surfaces of the folding rulers or on the measuring jaws of the Wiha callipers.

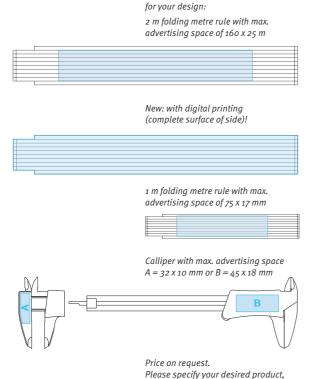



A limited advertising space is available

quantity and the number of colours

to be printed.

- Swiss precision with all





Permanent advertising -Longlife

- distinctly longer service life of Longlife rulers compared to wooden folding rulers because of water resistance

Versatile -

your name on the ruler

- 2 m, 1 m, white, yellow, further colours on request


Versatile -

your name on the callipers

- special colours on request

Top product


folding rulers and callipers

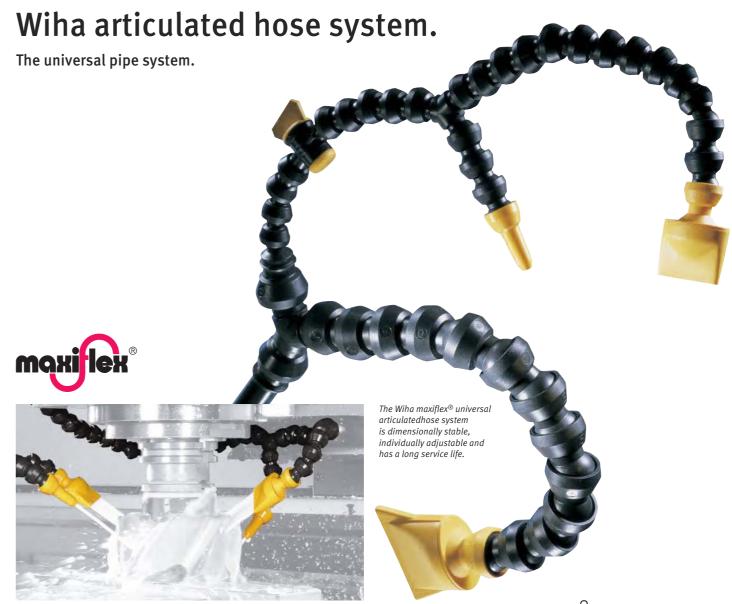


Wiha maxiflex® is a universal articulated hose system with maximum flexibility.

The broad range of hose joints, nozzles, connections, junctions and stop valves supply perfect solutions for every cooling or lubrication task.


A high quality and indestructible plastic, extensive design knowledge and precise manufacturing of all components ensures that this articulated hose system can be adapted for each individual application in day-to-day practice. With tight fitting components, maxiflex® is dimensionally stable, meaning no altering under pressure or via machine vibrations.



Unrestricted flow design



Assembly pliers and separation wedge



Permanent

- high quality, indestructible, dimensionally stable plastic
- resistant to chemicals and solvents
- is not an electrical conductor

Universal use

- cooling and lubrication for sawing, drilling, milling, grinding and machining processes
- blowing out and drawing in of air
- conducting of solvents
- positioning of auxiliary aids (so-called third hands)

Flexible

adapter solutions for other hose systems

Precise

 Swiss precision with articulated hose assortment



Wiha articulated hose system.

The universal pipe system.

maxiflex® programme ø ½" (6.35 mm).				
	Order-No 27085	o. Article-No. — 1		
99999999		Pack with 22 segments, assembled		
		Length: 280 mm		
00000000	27086	412 2060 1		
00000000		Pack with 80 segments, assembled		
	27087	Length: 1000 mm 412 2220 1		
-	21001	Pack with 4 cylindrical nozzles Ø 1.6 mm		
	27088	412 2240 1		
		Pack with 4 cylindrical nozzles Ø 3.2 mm		
	27089	412 2260 1		
		Pack with 4 cylindrical nozzles ø 5.6 mm		
	27090	412 2280 1		
		Pack with 2 flat nozzles, 7 holes (Ø 1.5 mm)		
1000		24 mm wide		
	27091	412 2330 1		
		Pack with 2 flat nozzles		
_	07000	24 mm wide		
	27092	412 2420 1		
		Pack with 4 angular nozzles Ø 1.6 mm		
	27093	412 2440 1		
	2.000	Pack with 4 angular nozzles ø 3.2 mm		
	27094	412 2460 1		
		Pack with 4 angular nozzles ø 5.6 mm		
The second second	27095	412 2480 1		
mim		Pack with 2 multi-hole angular nozzles,		
	27096	7 holes (ø 2 mm) 412 2640 1		
	27096	Pack with 4 adapters for LOC-LINE® Flexi		
		and ARIANA Cool-Line		
	27097	412 2650 1		
		Pack with 4 spherical double socket		
		segments		
0440	27098	412 2660 1		
		Pack with 4 double nipples		
Contract of the last of the la	27099	412 2710 1		
		Pack with 4 threaded nipples R 1/8"		
	07400	440,0700		
	27100	412 2720 1		
		Pack with 4 threaded nipples R 1/4"		
A.	27101	412 2740 1		
	27101	Pack with 2 Y-junctions		
-				
	27102	412 2770 1		
Market Market		Pack with 2 regulating valves		
~	27103	412 2780 1		
		Pack with 2 segment clips		
	28006	412 2020 1		
	20000	6 short nozzles, assembled, with:		
THE REAL PROPERTY.		1 threaded nipple R 1/8"		
		1 segment		
		1 short cylindrical nozzle ø 2.5 mm		
	20446	410.0700		

Ball valve with threaded outlet G 1/4"

maxiflex® programme ø 1/4" (6.35 mm).

maximex programm	C 9 /4 (
	Order-No.	Article-No.
	27084	412 2010 1
_0000000000		maxiflex®-set, assembled
8		1 threaded nipple R 1/4"
£ ?		22 segments
ž ,		1 cylindrical nozzle ø 3.2 mm
¥ .		Total length: 320 mm
w .		
	27108	412 2920 1
		Separation wedge
	0=100	440.0000
	27109	412 2930 1
		Assembly pliers
	27104	412 2810 1
	21104	Set with magnetic foot and ball valve,
*		assembled
\$		1 threaded nipple R 1/4"
I		22 segments
		1 cylindrical nozzle ø 3.2 mm
		Magnetic foot with hose nozzle ø 11 mm
	Extra:	Magnetic adhesion 80 N
	27105	412 2820 1
		Set with magnetic foot, assembled
		2 threaded nipples R 1/4"
3 8		44 segments, length: 2 x 320 mm
3 3		2 cylindrical nozzles ø 3.2 mm
		Magnetic foot with hose nozzle ø 11 mm
	Extra:	Magnetic adhesion 80 N
	27106	412 2830 1
<u> </u>		Set with magnetic foot and ball valve,
<u>*</u>		assembled
8		1 threaded nipple R 3/8" for hose diameter 1/2"
8		1 reduction of hose diameter from 1/2" to 1/4"
-8		22 segments
- 14		1 cylindrical nozzle ø 3.2 mm
		Magnetic foot with hose nozzle ø 11 mm
	Extra:	Magnetic adhesion 150 N
	27107	412 2850 1
		Distribution block with 3 ball valves
0 0 0		Ball valves with threaded outlets R 1/4"
- Comp		Hose nozzle ø 11 mm
	Extra:	Magnetic adhesion 4 x 95 N
	30518	412 2000 1
		maxiflex® basic set
		3 tubes à 280 mm
		2 cylindrical nozzles ø 1.6 mm
Section 1997		3 cylindrical nozzles ø 3.2 mm
		2 cylindrical nozzles ø 5.6 mm
		1 flat nozzle 24 mm
		1 flat nozzle 24 mm, 7 holes ø 1.5 mm
		2 Y-junctions
		1 spherical double socket segment
		2 threaded nipples R 1/8"
		3 threaded nipples R 1/4"
		1 adapter for LOC-LINE®
		1 assembly pliers
		1 separation wedge

maxiflex® programme ø $\frac{1}{2}$ " (12.7 mm).

	Order-No.	. Article-No.
	27111	412 4030 1
0000000		Pack with 12 segments, assembled
		Length: 265 mm
	27112	412 4060 1
		Pack with 48 segments, assembled
		Length: 1000 mm
	27113	412 4130 1
		Pack with 4 jointed pipe segments
		Length: 440 mm
	27114	412 4160 1
		Pack with 4 segment clamps incl. screws
The second second	27115	412 4220 1
		Pack with 4 cylindrical nozzles Ø 10 mm
	27116	412 4240 1
		Pack with 2 flat nozzles, 6 holes (Ø 10 mm)
		30 mm wide
The second second	27117	412 4330 1
		Pack with 2 flat nozzles 30 mm wide
	27118	412 4360 1
		Pack with 2 flat nozzles 60 mm wide
	27119	412 4420 1
		Pack with 4 angular nozzles ø 7 mm
	27120	412 4440 1
		Pack with 4 angular nozzles Ø 10 mm
	27121	412 4460 1
IIIIIII		Pack with 2 multi-hole angular nozzles,
CONTRACTOR OF THE PARTY OF THE	07400	8 holes (ø 3.5 mm)
	27122	412 4620 1
Red Laboratory		Pack with 2 reducers,
		1/2" to 1/4" system
	27123	412 4640 1
	21125	Pack with 4 adapters for LOC-LINE® Flexi
		and ARIANA Cool-Line
	27124	412 4650 1
	LIILT	Pack with 4 spherical double socket
		segments
	27125	412 4660 1
	21120	Pack with 4 double nipples
		T doi: Will 4 double Hippies
	27126	412 4720 1
COLUMN TO SERVICE STATE OF THE PARTY OF THE	2,120	Pack with 4 threaded nipples R 3/8"
Control of the Contro		. ac., mai i anodaou inppico ii o/o
	27127	412 4730 1
		Pack with 4 threaded nipples R 1/2"
A	27128	412 4740 1
1		Pack with 2 Y-junctions
4		
A -	27129	412 4750 1
300		Pack with 2 Y reducer junctions
distant.		1/2" to 1/4" system
- The same of the	27130	412 4770 1
On the last		Pack with 2 regulating valves
	27131	412 4780 1
100		Pack with 2 segment clips
AND DESIGNATION OF THE PERSON NAMED IN COLUMN 1		

maxiflex® programme ø $\frac{1}{2}$ " (12.7 mm).

		Article-No.	
THE REAL PROPERTY.	29447	412 4760	1
		Ball valve with	
THE REAL PROPERTY AND ADDRESS OF THE PERTY ADDRESS OF THE PERTY ADDRESS OF THE PERTY AND ADDRESS OF THE PERTY ADDR		threaded outlet G 3/8"	
little-			
	27110	412 4010	1
_000000g		maxiflex®-set, assembled	
8 8		1 threaded nipple R 1/2"	
8		12 segments	
W 7		1 cylindrical nozzle ø 10 mm	
		Total length: 320 mm	
	27134	412 4920	1
		Separation wedge	
	27135	412 4930	1
	2/133		ı
		Assembly pliers	
A	27132	412 4820	1
<u></u>		Set with magnetic foot and b	all valve,
2		assembled	
- 4		1 threaded nipple R 3/8"	
		12 segments	
		1 cylindrical nozzle ø 10 mm	
		Magnetic foot with hose nozzle	ø 13 mm
	Extra:	Magnetic adhesion 150 N	
	27133	412 4860	1
		Distribution block with 3 ball	
		Ball valve with threaded outlet	R 3/8"
ions.	Extra:	Magnetic adhesion 4 x 95 N	
	30519	412 4000	1
		maxiflex® basic set	
		3 tubes à 265 mm	
		3 cylindrical nozzles ø 10 mm	
marker .		1 flat nozzle 30 mm	
		1 flat nozzle 60 mm	
		1 flat nozzle 30 mm, 6 holes ø	3.3 mm
直直和			
		1 Y-junction	
		1 Y-junction 1 Y reducer junction	
			m 1/2" to 1/4
		1 Y reducer junction	m 1/2" to 1/4
		1 Y reducer junction 1 reduction of hose diameter fro	m 1/2" to 1/4
		1 Y reducer junction 1 reduction of hose diameter fro 3 threaded nipples R 1/2"	m 1/2" to 1/4
		1 Y reducer junction 1 reduction of hose diameter fro 3 threaded nipples R 1/2" 2 threaded nipples R 3/8"	m 1/2" to 1/4

Wina Info You currently use a different system? No problem!			
System	Information		
LOC-LINE®	Compatible with help of maxiflex® adapter order no. 27096 (1/4") and 27123 (1/2").		
Snap-Loc®	Compatible on both sides (external and internal ball) without adapter.		
ARIANA Cool-Line	Compatible with help of maxiflex® adapter order no. 27096 (1/4") and 27123 (1/2").		
LEGROM-VARIO- System®	Small version ¼" is compatible with help of maxiflex adapter (order no. 27096) when using Varios outer ball and adapters inner ball.		